

USER MANUAL

3.5 Inch car rearview mirror monitor

Package

1. 3.5inch car rearview mirror monitor
2. Wire harness
3. User manual
4. Cables cover (option)

Specifications


Screen Size	3.5"
Display Screen	TFT-FCD
Display Resolution	320(QD)×RGB×240(V)
Aspect Ratio	4:3
Color Depth	16.7M dithering
Pixel Pitch (mm)	0.219X0.219
Power Consumption	≤2W
Working Voltage	DC 12V
Video Input	VIDEO IN to GPS/DVD (default) Camera to Backup camera.
Signal System	PAL/AUTO/NSTC



Wiring Options

Use Backup Camera only

Connect Red wire to Reverse Light +, Black to Ground.

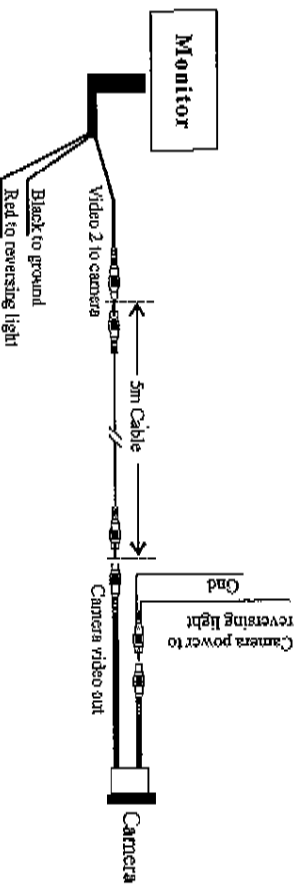


Please consult your local car dealers for how to remove the mirrors

Use Backup camera and Video input (such as GPS)

Red wire to Acc Power and Black wire to Ground.

- I. Under power-on condition: when reverse gear is engaged, the system automatically switches from video sources (such as GPS) to backup camera video, and when out off reverse gear, it switches back automatically. Refer to Optional Wiring Diagram below.
- II. Under power-off condition: When reverse gear is engaged, the system automatically starts on to find the camera signal and display backup video. When out off reverse gear, it switches off automatically.
- III. PWR Button on middle of the Mirror
 - 1) Camera mode (in reverse), this button is used to adjust the backlight of the monitor.
 - 2) Video mode, this button is used to turn monitor on/off.

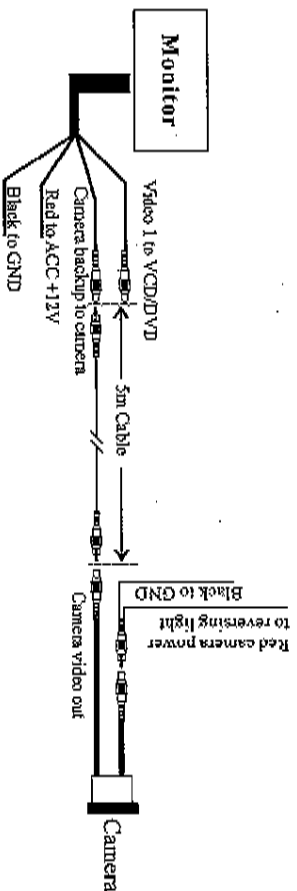

Optional Wiring Diagram

Precautions for Use of Mirror monitor

- I. The Mirror monitor is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.
- II. Do not apply excessive force to the monitor surface or the adjoining areas since this may cause the color tone to vary.
- III. Clean with a soft dry cloth and/or Windex only.
- IV. Do not attempts to disassemble the mirror monitor.

Professional installation is highly recommended